



- NOTES:
1. APPLY ACOUSTICAL SEALANT ON BOTH SIDES OF WALL AT BOTTOM PLATE AND TOP PLATE.
 2. SEAL ALL SOUND LEAKAGE POINTS.
 3. AVOID CONNECTING DUCTS, JUNCTION BOXES, PIPING OR OTHER SOUND CARRIERS FROM ONE WALL FACE TO THE OTHER.
 4. ALL DOORS LOCATED IN SOUND WALLS SHALL HAVE SOUND SEALS.
 5. OUTLET BOXES SHALL BE NO CLOSER THAN 24" ON THE SAME WALL AND SEPARATED BY A STUD CAVITY.
 6. BACK TO BACK OUTLETS ARE NOT PERMITTED.
 7. SOUND BATTS SHALL EXTEND FULL HEIGHT OF WALL.

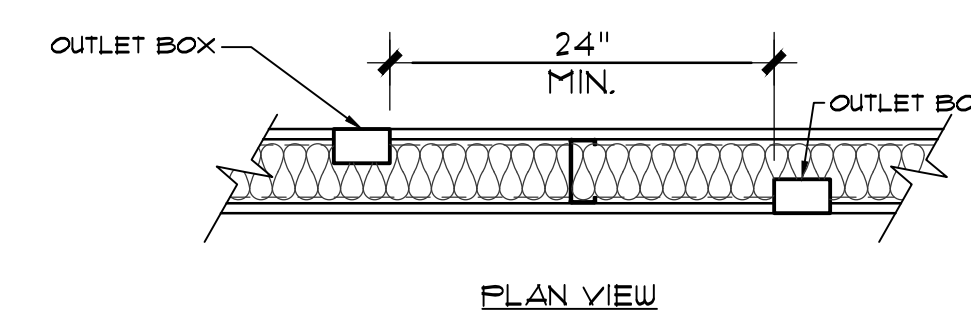

2 Sound Wall Details
SCALE 1" = 1'-0"

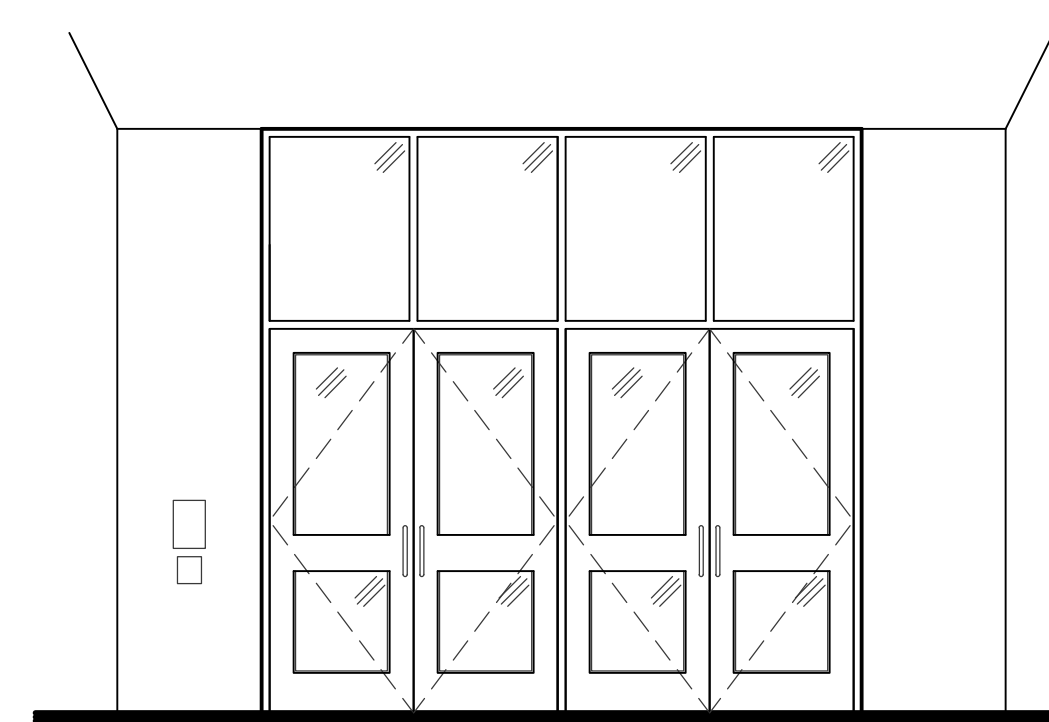

NOTE: BASIS OF DESIGN IS YKK AP MODEL 50M MONUMENTAL DOORS WITH 5" STILES, 5" MID RAIL AND 10" BOTTOM RAIL.

3 New Storefront Elevation
SCALE 1/4" = 1'-0"

1 Main Level New Reference Plan
SCALE 1/8" = 1'-0"



Plan Key Notes

1. NEW RAISED PLATFORM. REFER TO SHEET A2.6.
2. NEW MILLWORK. REFER TO SHEET A8.1 THROUGH A8.3.
3. NEW BOLLARDS - REFER TO DETAIL 3/A1.
4. NEW RAMP WITH NEW WALL MOUNTED HANDRAIL - REFER TO AXXX.
5. NEW TRANSACTION WINDOW - REFER TO AXXX.
6. NEW STEPS WITH WALL MOUNTED HANDRAILS - REFER TO AXXX FOR DETAILS.
7. ALIGN FINISHES.
8. NEW FRAMING AND FAUX COLUMN WRAP - REFER TO DETAIL X/AXX.
9. NEW STOREFRONT DOORS - REFER TO 3/A2.3.
10. ALL EXISTING SHELVING SHALL BE SALVAGED AND REUSED TO MAXIMUM EXTENTS POSSIBLE. ADD NEW WHERE REQUIRED.
11. OWNER PROVIDED UNDERCOUNTER REFRIGERATOR.
12. REFRIGERATOR.
13. NEW MICROWAVE OVEN.
14. COFFEE MAKER.
15. UNDERCOUNTER DISHWASHER.
16. SINK REFER TO PLUMBING.
17. NEW INFILL FRAMING FOR WINDOW BLACKOUT - REFER TO DETAIL X/AXX.
18. OWNER PROVIDED EQUIPMENT SHOWN FOR REFERENCE ONLY. NOT IN CONTRACT.
19. NEW TELEVISION MONITOR. REFER TO ELECTRICAL FOR ROUGH IN REQUIREMENTS - MONITOR AND BRACKET IN CONTRACT.
20. NEW EVIDENCE LOCKER PROVIDED AND INSTALLED BY CONTRACTOR.
21. EXISTING EVIDENCE LOCKER PROVIDED BY OWNER - INSTALLED BY CONTRACTOR.
22. NEW SECURITY GRADE BENCH.
23. NOT USED.
24. NEW EXTERIOR WALL INFILL - REFER TO DETAIL X/AXX.
25. NEW WEAPONS RACK - REFER TO XXX.

26. OWNER PROVIDED WHITE MARKER BOARD.
27. PROVIDE NEW FIRE TREATED WOOD BLOCKING IN EXISTING PARTITION FOR SUPPORT OF NEW WALL CABINETS.
28. COORDINATE NEW WALL LOCATION WITH EXISTING ACCESS PANEL.
29. EXTEND WALL FULL HEIGHT TO STRUCTURE ABOVE AND BRACE TO SUPPORT NEW WALL CABINETS.
30. PROVIDE FIRE TREATED WOOD BLOCKING FOR WALL MOUNTED TV, PROVIDE ELECTRICAL, TV, AND DATA OUTLETS IN WALL. BEHIND TV MOUNT. COORDINATE WITH TV SIZE, MOUNT AND ELECTRICAL.
31. MOTORIZED PROJECTOR SCREEN. COORDINATE POWER REQUIREMENTS WITH ELECTRICAL.
32. EXISTING RELOCATED GUN STORAGE RACK.
33. EXISTING RELOCATED HIGH DENSITY EVIDENCE.
34. EXISTING RELOCATED FINE WOOD.
35. EXISTING RELOCATED FINGERPRINT EQUIPMENT.
36. EXISTING RELOCATED DRUG PROCESSING EQUIPMENT.
37. PARTITION EXTENDED TO DECK AND SEALED AIR TIGHT.

Interior Partition Legend

NOTE: ALL PARTITIONS SHALL BE CONSIDERED P1 UNLESS OTHERWISE NOTED.

MARK: P1	HEIGHT: EXTEND 6" ABOVE CEILING HEIGHT / EXTEND FULL HEIGHT IF CEILING IS EXPOSED TO STRUCTURE ABOVE.
SYMBOL: [Symbol]	ASSEMBLY: ONE (1) LAYER OF 1/2" GYPSUM WALL BOARD APPLIED AT RIGHT ANGLES OR PARALLEL TO EACH SIDE OF 3 5/8" METAL STUDS AT 16" O.C. WITH 1" TYPE 'B' SCREWS AT 8" O.C. TO VERTICAL EDGES AND 12" O.C. TO TOP AND BOTTOM RUNNERS AND INTERMEDIATE STUDS.
MARK: P2	MODIFIER (A): CHASE WALLS ONE (1) LAYER OF 1/2" GYPSUM WALL BOARD APPLIED AT RIGHT ANGLES OR PARALLEL TO ONE SIDE OF 3 5/8" METAL STUDS AT 16" O.C. WITH 1" TYPE 'B' SCREWS AT 8" O.C. TO VERTICAL EDGES AND 12" O.C. TO TOP AND BOTTOM RUNNERS AND INTERMEDIATE STUDS. PROVIDE SOUND ATTENUATION BLANKETS EXTENDING TO DECK ABOVE AND SEAL TIGHT. RETURN AIR PATH THROUGH PARTITION SHALL INCORPORATE SOUND BOOTS - REFER TO DETAIL 2/A2.3.
SYMBOL: [Symbol]	MODIFIER (B): 6" WALL ONE (1) LAYER OF 1/2" GYPSUM WALL BOARD APPLIED AT RIGHT ANGLES OR PARALLEL TO EACH SIDE OF 6" METAL STUDS AT 16" O.C. WITH 1" TYPE 'B' SCREWS AT 8" O.C. TO VERTICAL EDGES AND 12" O.C. TO TOP AND BOTTOM RUNNERS AND INTERMEDIATE STUDS.
MARK: P2	HEIGHT: TIGHT TO STRUCTURE ABOVE
SYMBOL: [Symbol]	ASSEMBLY: 1 HOUR RATED PARTITION - REFER TO UL DETAIL U419 ON 6-SHEET L8X-X - 3 5/8" METAL STUDS

General Notes

1. REFER TO SHEET AXX FOR DOOR SCHEDULE, ELEVATIONS, AND DETAILS.
2. REFER TO SHEET A2.4 FOR WINDOW ELEVATIONS.

Interior Partition Notes

1. ALL WOOD IN CONTACT WITH CONCRETE SHALL BE PRESSURE TREATED.
2. ALL GYPSUM BOARD SHALL BE APPLIED WITH SCREWS.
3. ALL GYPSUM BOARD ABUTTING OTHER MATERIAL SHALL BE FINISHED WITH METAL EDGES.
4. IT SHALL BE ASSUMED THAT THE PARTITION TYPE EXTENDS FROM CALLOUT THROUGH OPENINGS TO END OF PARTITION OR TO ANOTHER PARTITION TYPE.
5. ALL NEW WALL FINISHES SHALL BE ALIGNED WITH EXISTING WALL FINISHES TO REMAIN WHERE NEW AND EXISTING FINISHES ABUT ONE ANOTHER.
6. CONTRACTOR SHALL PROVIDE COMPLETE SHOP DRAWINGS FOR ALL LIGHT GAUGE METAL STUD PARTITIONS INCLUDING LATERAL BRACING AND CONNECTION DETAILS. SHOP DRAWINGS SHALL BE PREPARED, SIGNED, AND SEALED BY A PROFESSIONAL ENGINEER LICENSED IN THE STATE OF GEORGIA.
7. PROVIDE DOUBLE STUDS, BLOCKING AND DIAGONAL BRACING AS REQUIRED ON LIGHT GAUGE METAL STUD PARTITIONS.
8. PROVIDE ADEQUATE BLOCKING/SUPPORT IN WALLS FOR CABINETS AND EQUIPMENT SUPPORT.

Partition Symbol legend

SYMBOL	WALL DESCRIPTION
[Symbol]	EXISTING PARTITION
[Symbol]	EXISTING 1 HOUR RATED PARTITION
[Symbol]	EXISTING SMOKE TIGHT PARTITION
[Symbol]	NEW PARTITION
[Symbol]	NEW SMOKE TIGHT PARTITION
[Symbol]	NEW 1 HOUR RATED PARTITION
[Symbol]	NEW SOUND PARTITION

NOT FOR CONSTRUCTION - NOT FOR CONSTRUCTION - NOT FOR CONSTRUCTION - NOT FOR CONSTRUCTION - NOT FOR CONSTRUCTION

© 2017
PRECISION PLANNING, INC.
ALL RIGHTS RESERVED.

THESE CONSTRUCTION DOCUMENTS AND ANY INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF PRECISION PLANNING, INC. AND ARE NOT TO BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF PRECISION PLANNING, INC.

NOT FOR CONSTRUCTION

PRECISION
Planning Inc.
planners • engineers • architects • surveyors

400 Pine Boulevard, Lawrenceville, GA 30046
770.338.8000 • www.ppai.us

Renovation of Existing Building for
Dunwoody City Hall
&
Police Headquarters
4800 Ashford Dunwoody Road
Dunwoody, GA 30338

PROJECT

**MAIN LEVEL
NEW REFERENCE PLAN
AND NOTES**

SHEET TITLE

RELEASE


DATE: 04/17/17
DATE: 04/17/17
DATE: 04/17/17
DATE: 04/17/17

NO. DESCRIPTION: 04/17/17
NO. DESCRIPTION: 04/17/17
NO. DESCRIPTION: 04/17/17
NO. DESCRIPTION: 04/17/17

DATE: 04/17/17
DATE: 04/17/17
DATE: 04/17/17
DATE: 04/17/17

FILE NAME: 04/17/17
FILE NAME: 04/17/17
FILE NAME: 04/17/17
FILE NAME: 04/17/17

A2.3

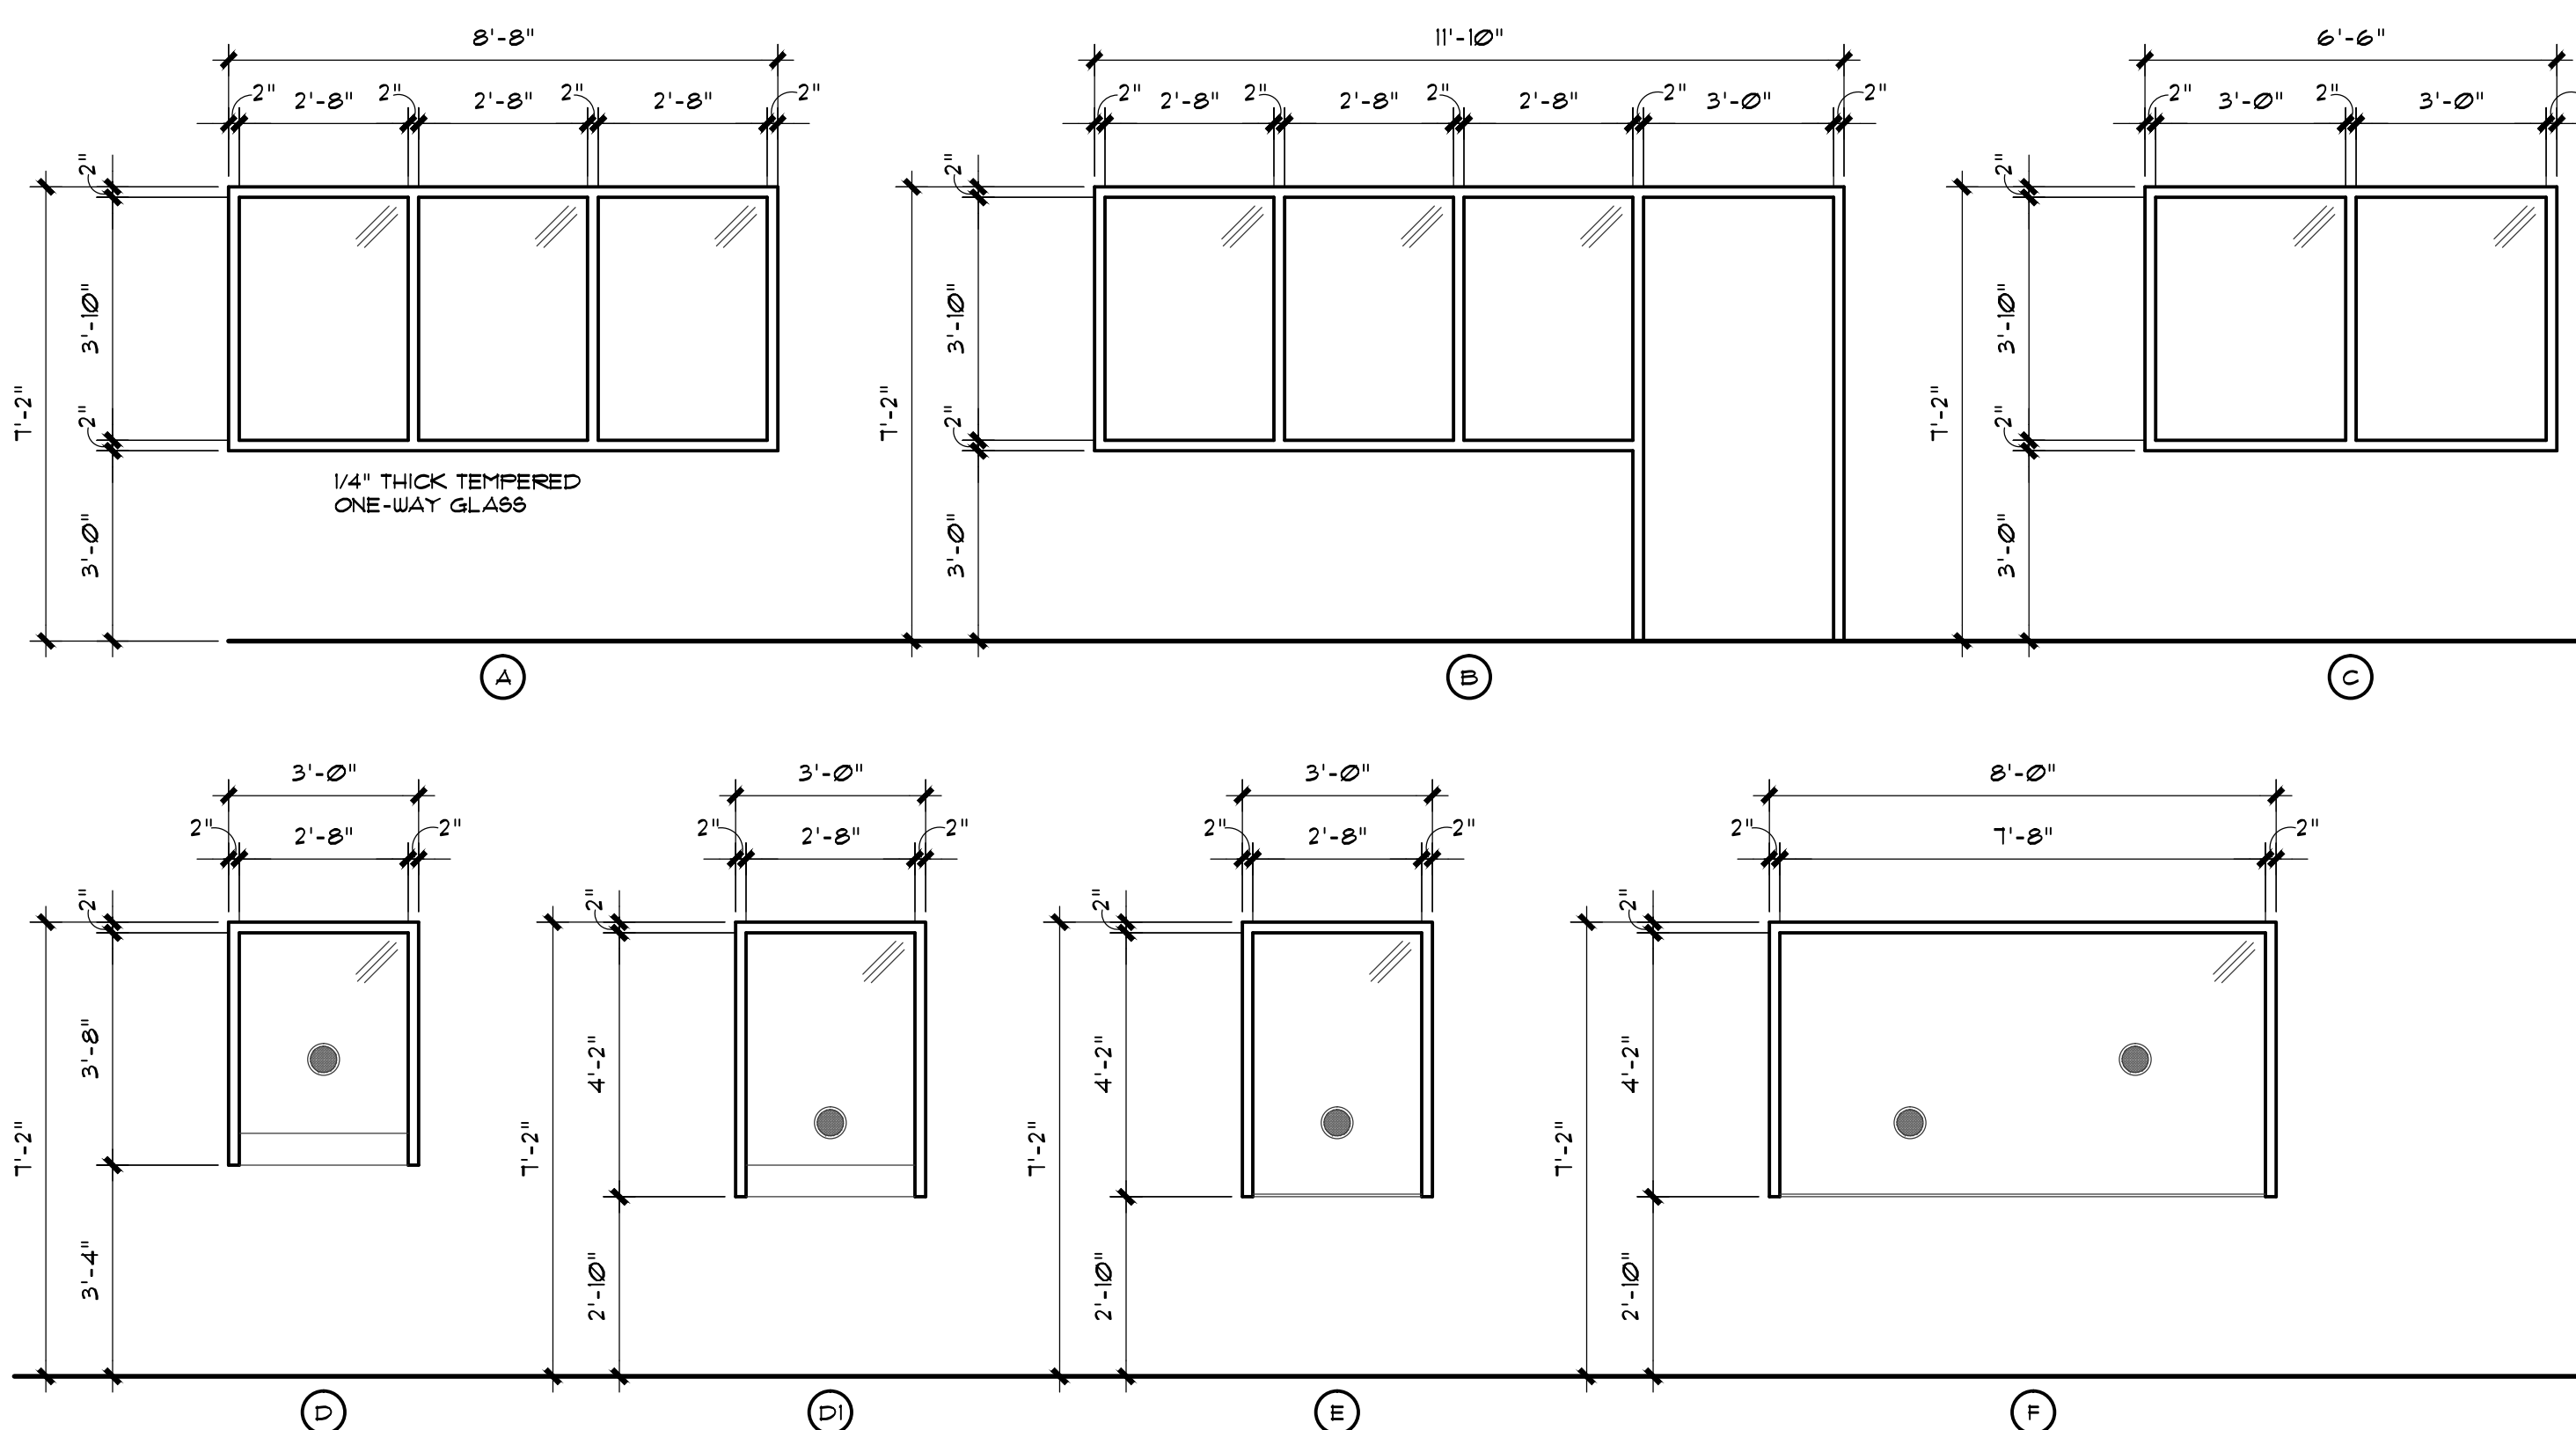

Upper Level New Reference Plan







1
A2.4

SCALE 1/8" = 1'-0"

Job North

General Notes

- | | |
|--|---|
| NOTE: ALL PARTITIONS SHALL BE CONSIDERED P1 UNLESS OTHERWISE NOTED. | |
| <div style="border: 1px solid black; padding: 5px; width: 40px; text-align: center; margin: 10px auto;">P1</div> | <p>HEIGHT: EXTEND 6" ABOVE CEILING HEIGHT / EXTEND FULL HEIGHT IF CEILING IS EXPOSED TO STRUCTURE ABOVE.</p> <p>ASSEMBLY:</p> <p>ONE (1) LAYER OF 1/2" GYPSUM WALL BOARD APPLIED AT RIGHT ANGLES OR PARALLEL TO EACH SIDE OF 3 5/8" METAL STUDS AT 16" O.C. WITH 1" TYPE "H" SCREWS AT 8" O.C. TO VERTICAL EDGES AND 12" O.C. TO TOP AND BOTTOM RUNNERS AND INTERMEDIATE STUDS.</p> <p>MODIFIER (A). CHASE WALLS</p> <p>ONE (1) LAYER OF 1/2" GYPSUM WALL BOARD APPLIED AT RIGHT ANGLES OR PARALLEL TO ONE SIDE OF 3 5/8" METAL STUDS AT 16" O.C. WITH 1" TYPE "H" SCREWS AT 8" O.C. TO VERTICAL EDGES AND 12" O.C. TO TOP AND BOTTOM RUNNERS AND INTERMEDIATE STUDS.</p> <p>MODIFIER (B). SOUND WALLS</p> <p>ONE (1) LAYER OF 1/2" GYPSUM WALL BOARD APPLIED AT RIGHT ANGLES OR PARALLEL TO ONE SIDE OF 3 5/8" METAL STUDS AT 16" O.C. WITH 1" TYPE "H" SCREWS AT 8" O.C. TO VERTICAL EDGES AND 12" O.C. TO TOP AND BOTTOM RUNNERS AND INTERMEDIATE STUDS. PROVIDE SOUND ATTENUATION BLANKETS, EXTEND TO DECK ABOVE AND SEAL TIGHT. RETURN AIR PATH THROUGH PARTITION SHALL INCORPORATE SOUND BOOTS. REFER TO DETAIL 2/A2.3</p> <p>MODIFIER (C). 6" WALL</p> <p>ONE (1) LAYER OF 1/2" GYPSUM WALL BOARD APPLIED AT RIGHT ANGLES OR PARALLEL TO EACH SIDE OF 6" METAL STUDS AT 16" O.C. WITH 1" TYPE "H" SCREWS AT 8" O.C. TO VERTICAL EDGES AND 12" O.C. TO TOP AND BOTTOM RUNNERS AND INTERMEDIATE STUDS.</p> |
| <div style="border: 1px solid black; padding: 5px; width: 40px; text-align: center; margin: 10px auto;">P2</div> | <p>HEIGHT: TIGHT TO STRUCTURE ABOVE ASSEMBLY.</p> <p>1-HOUR RATED PARTITION - REFER TO UL DETAIL U4/9 ON SHEET 18/XX</p> <p>3-5/8" METAL STUDS</p> |


- | Partition Symbol legend | |
|---|---------------------------------|
| <u>SYMBOL</u> | <u>WALL DESCRIPTION</u> |
|  | EXISTING PARTITION |
|  | EXISTING 1 HOUR RATED PARTITION |
|  | EXISTING SMOKE TIGHT PARTITION |
|  | NEW PARTITION |
|  | NEW SMOKE TIGHT PARTITION |
|  | NEW 1 HOUR RATED PARTITION |


[illegible]


A2.4

EXIST'G FFE


2 INFILL FRAMING
2X1 LOCATION,
1 EXISTING WALL,
1D FINISH AS
ADJACENT WALL

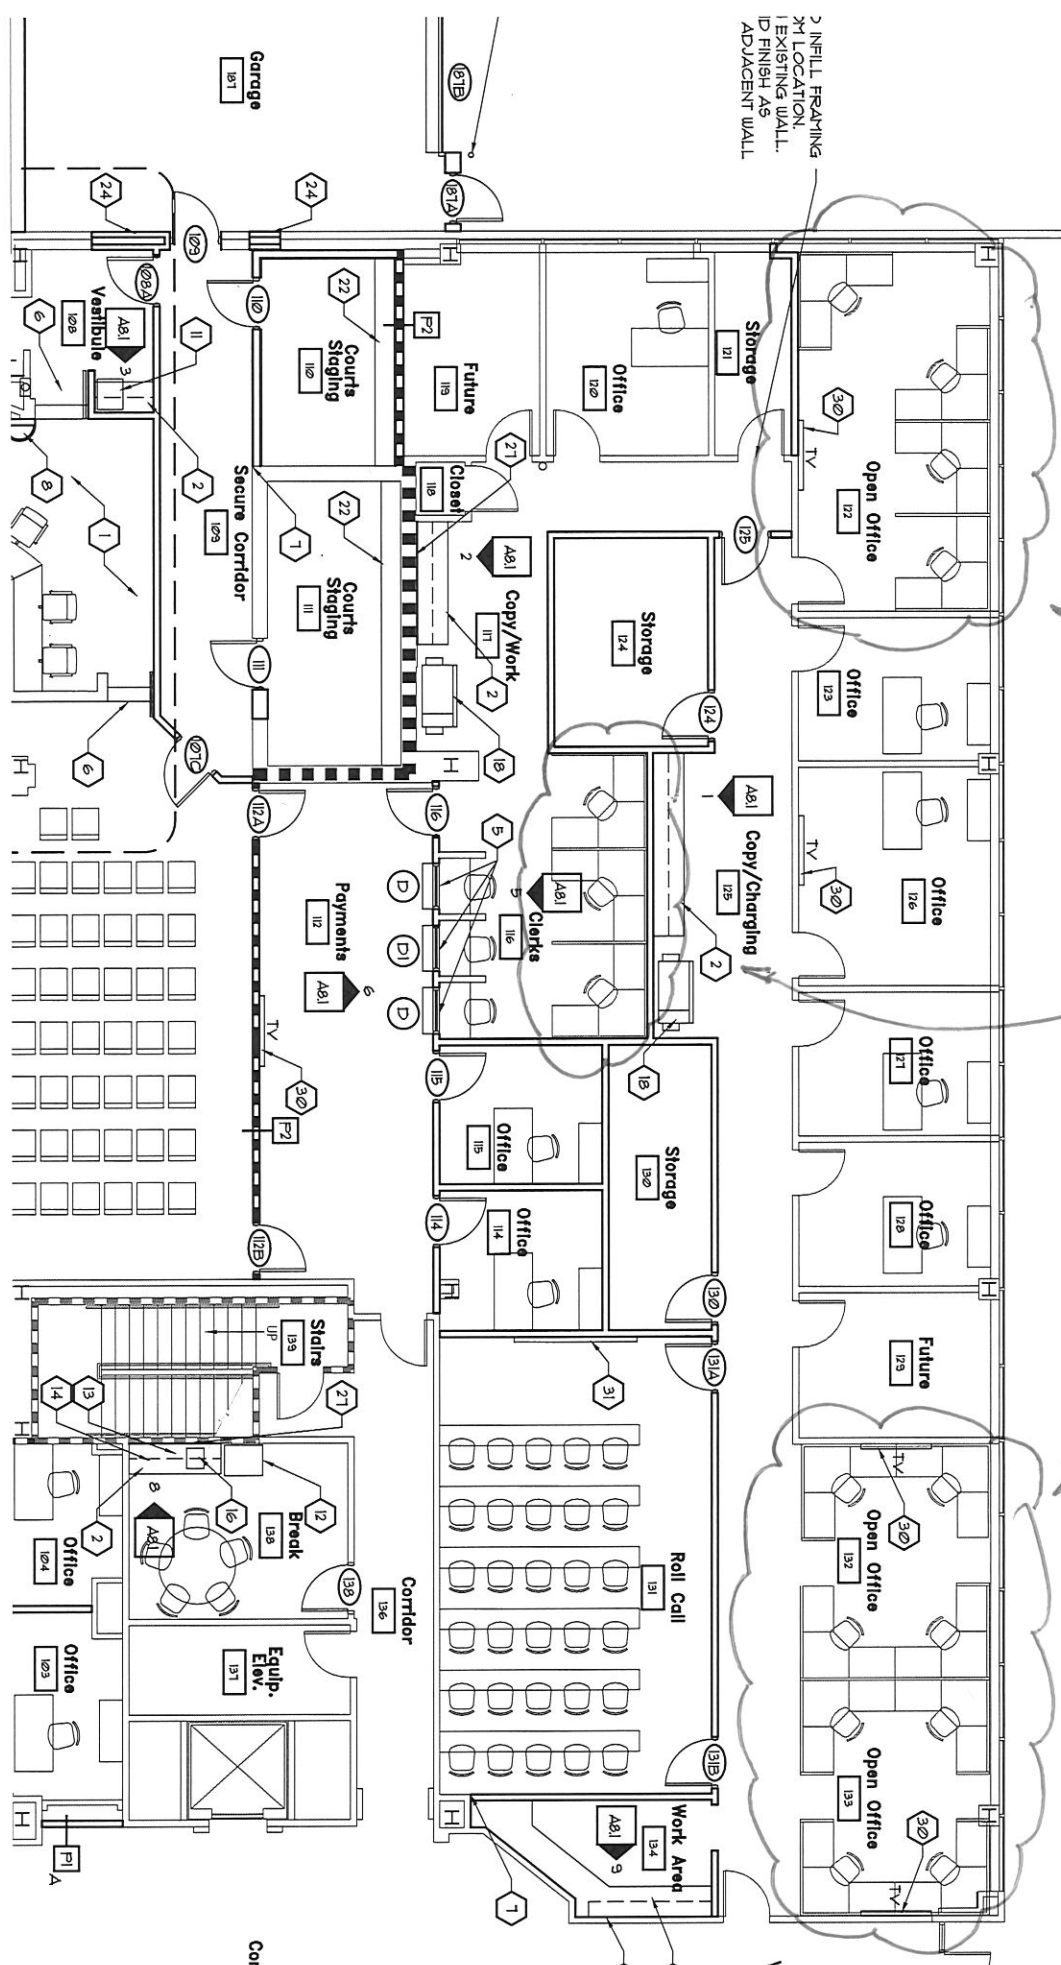

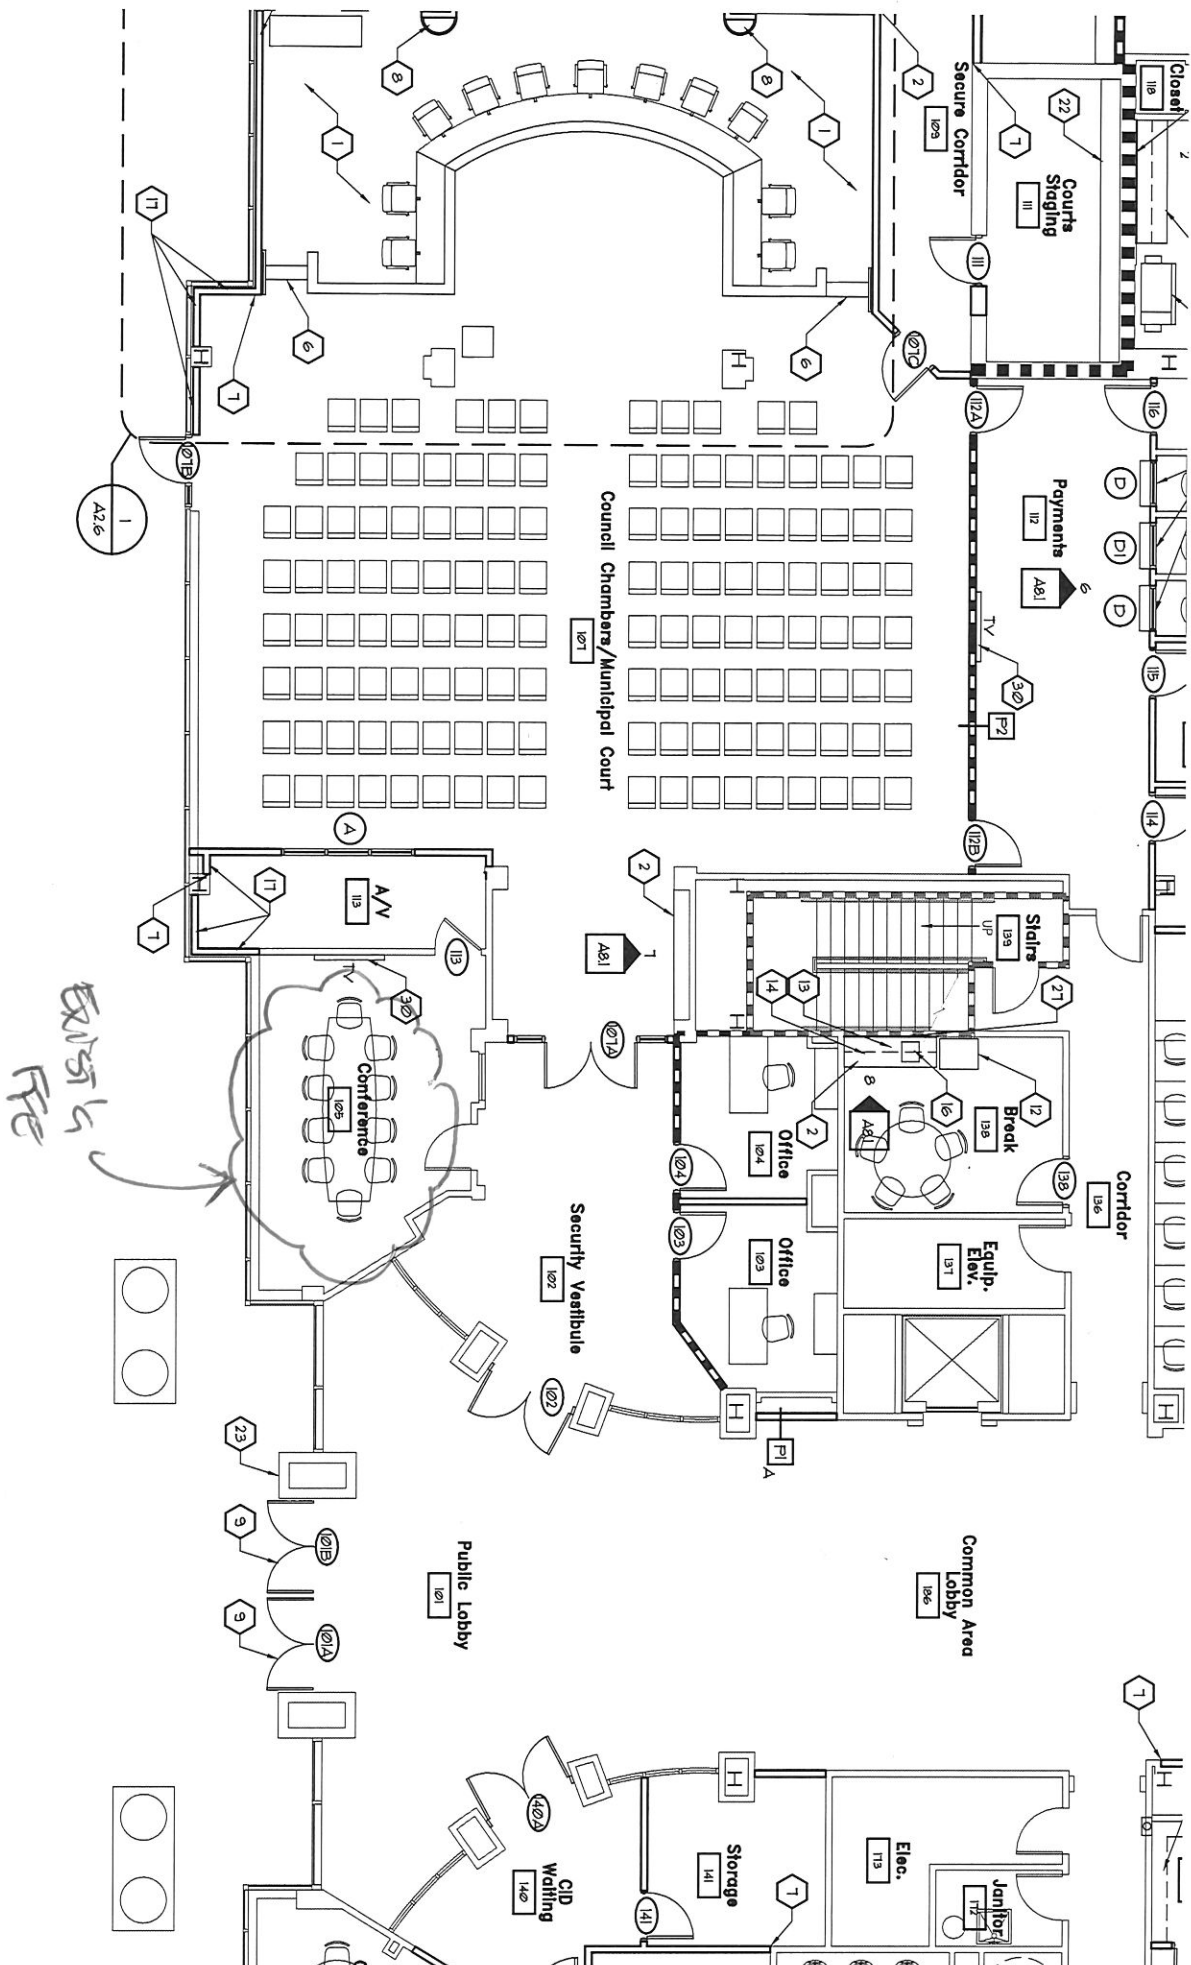


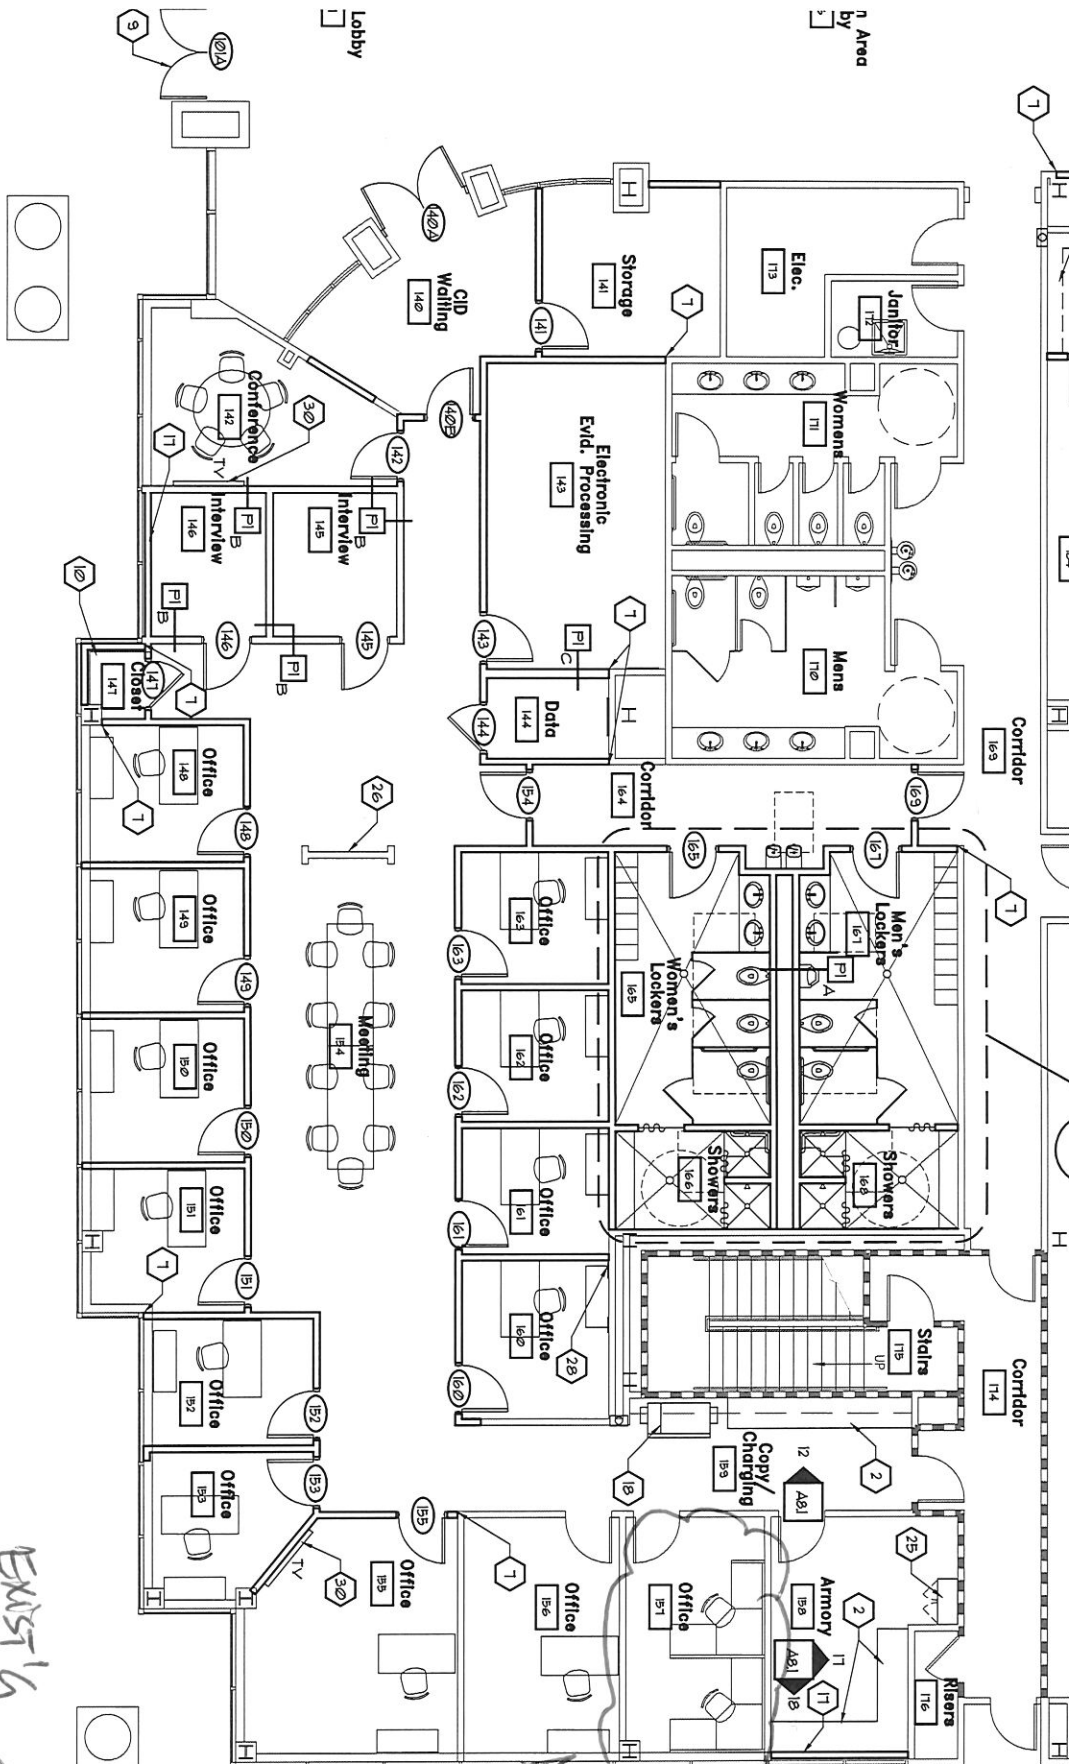


CONSTRUCTION - NOT FOR CONSTRUCTION - NOT FOR C

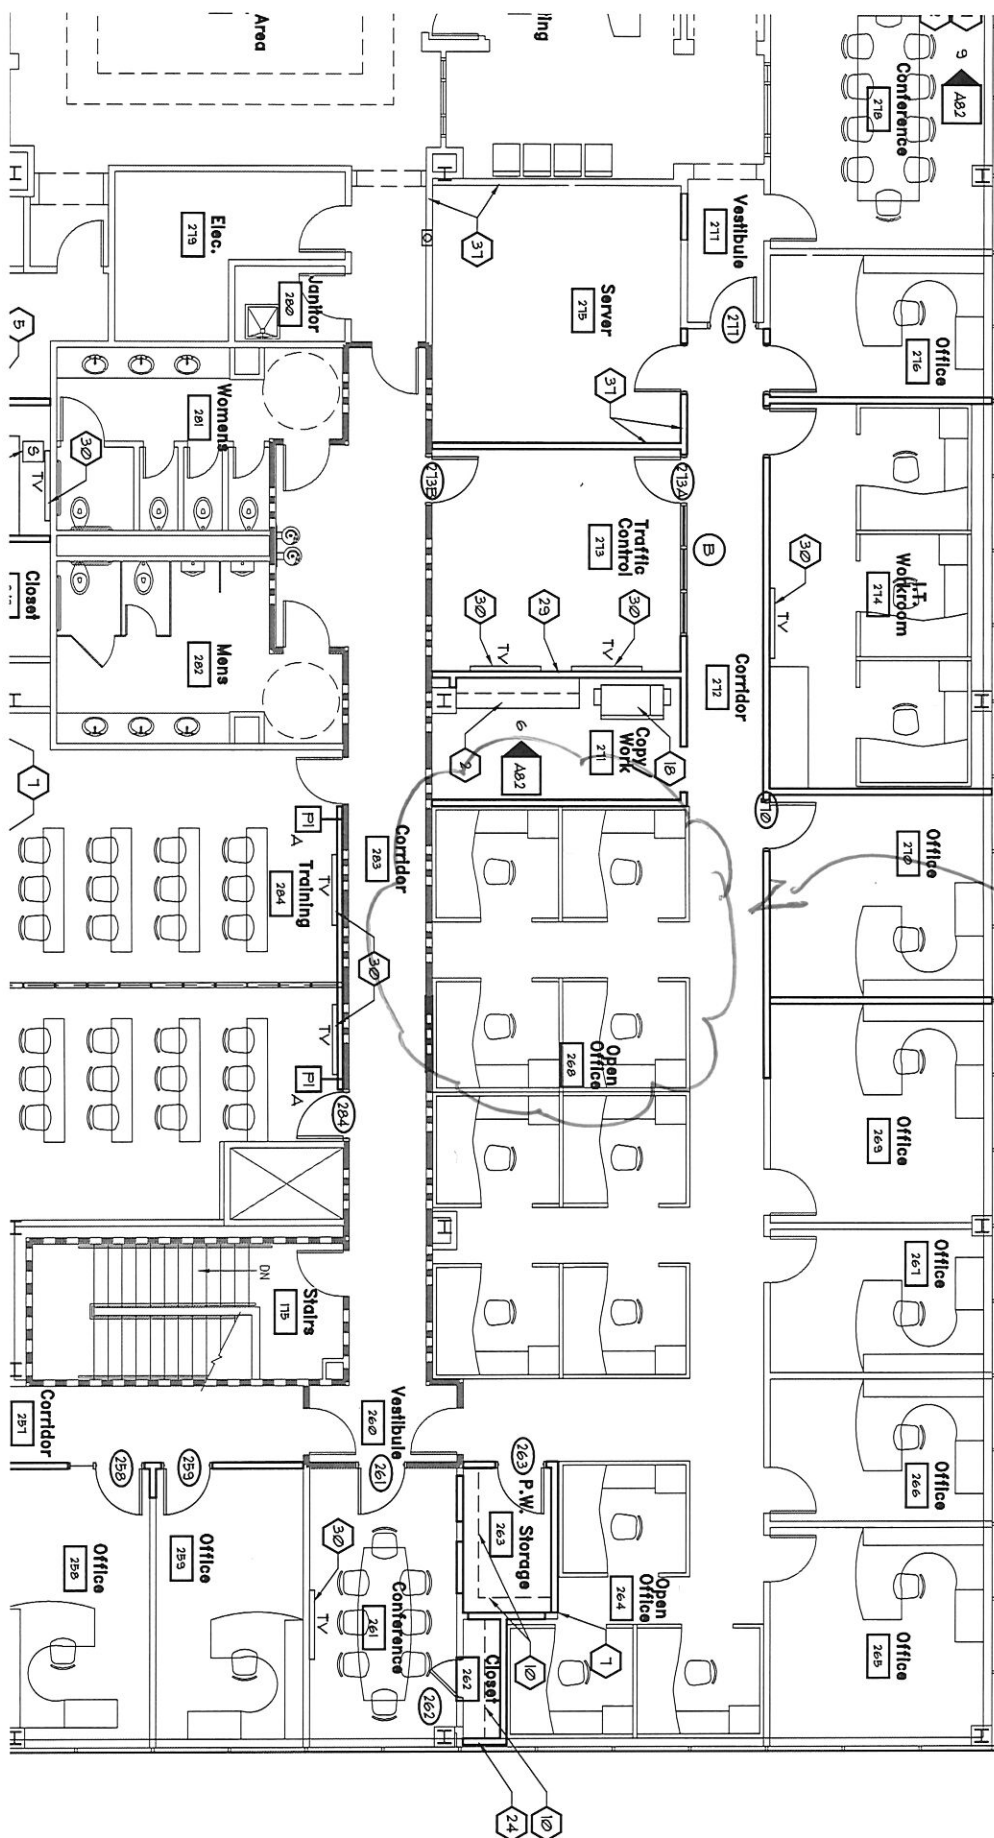

EXIST'S

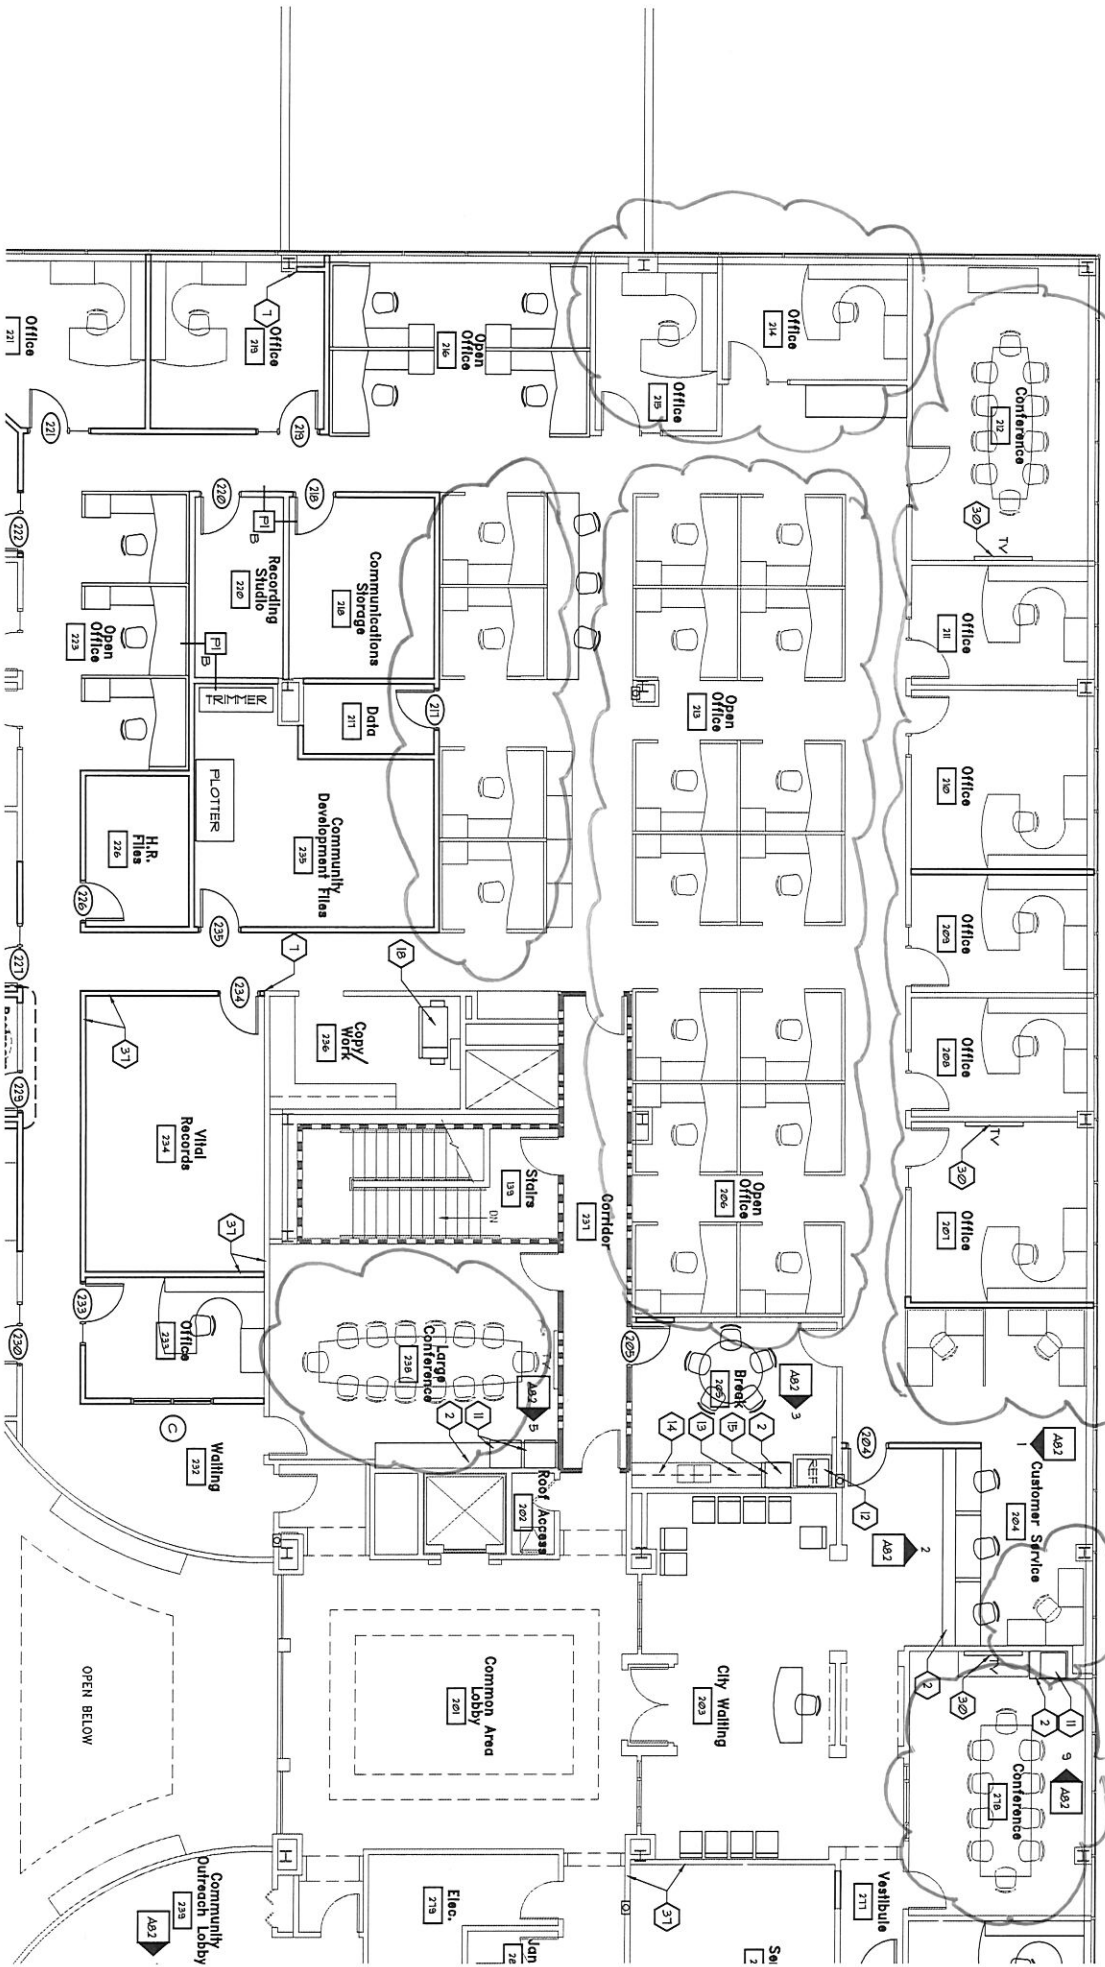

EXISTING ROOMS

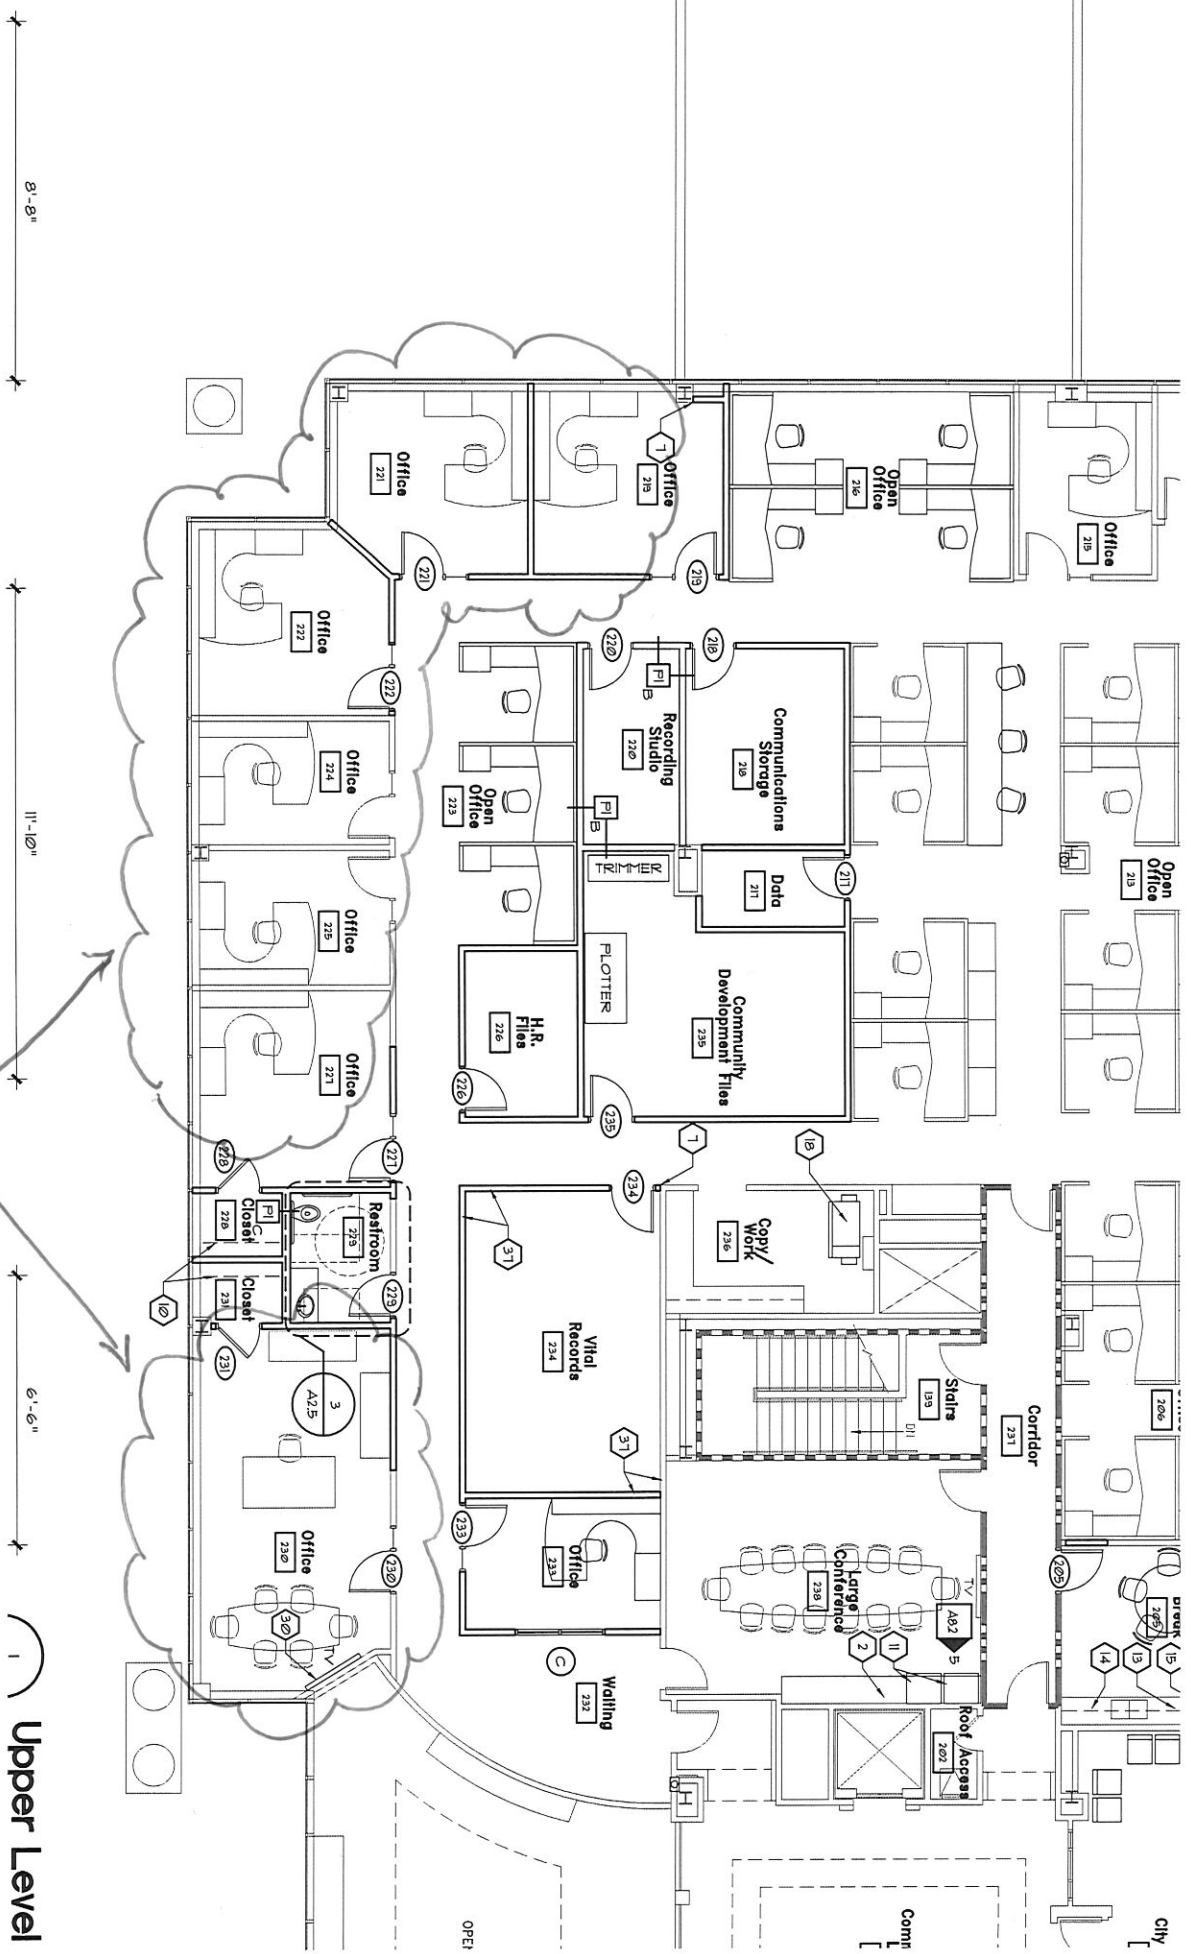

8'-8"

11'-10"

6'-6"

Upper Level

EXIST'G FFE